

P/N 202250 AFD-200 Filter Regulator


Automated Equipment, LLC

5140 Moundview Drive
Red Wing, Minnesota 55066
Phone: 1-800-248-2724
1-651-385-2273
Fax: 1-651-385-2172
<http://www.autoequipllc.com>



AFD-200 Filter Regulator Assembly P/N 202250 Replacement and Adjustment

The original regulator may be an SMC or WATTS brand. The replacement is WATTS.

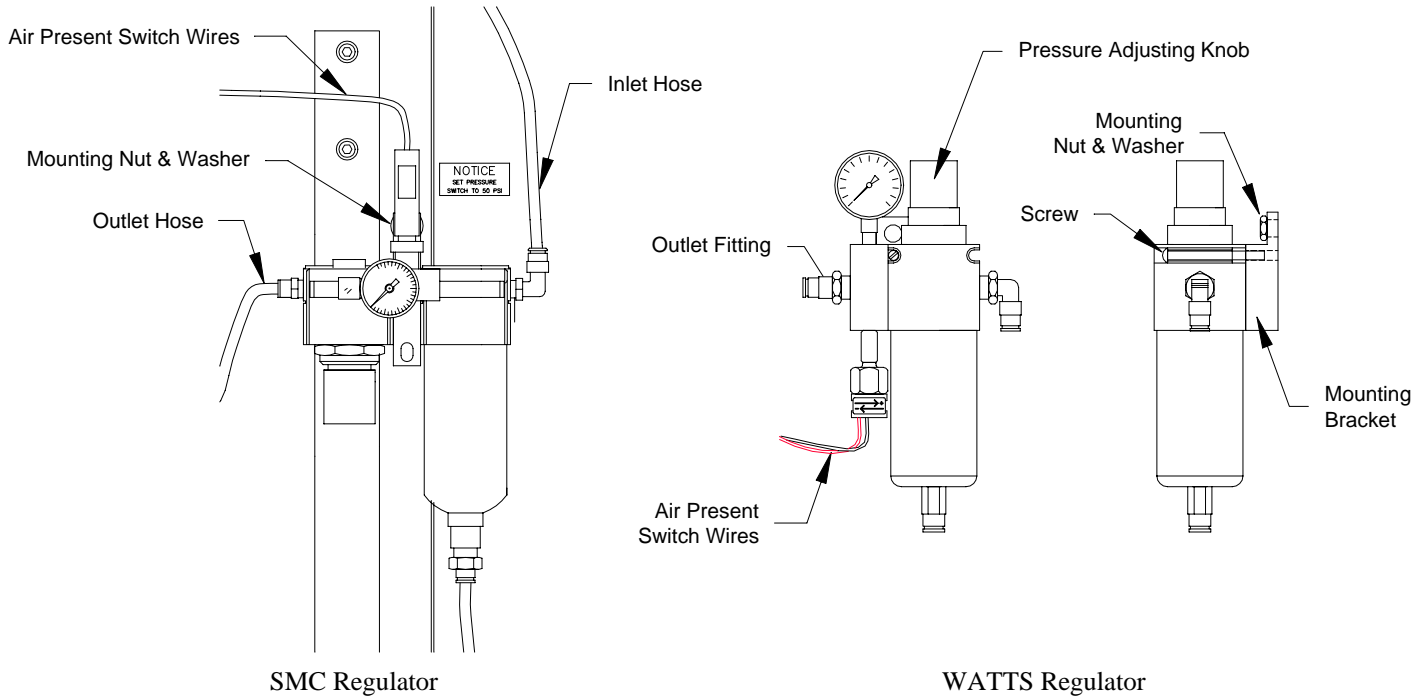

Tools required:

- Small flat blade screwdriver
- 7/16" wrench
- 5/32" allen wrench

Replacement

1. Turn the power switch off.
2. Remove the airline from the dispenser.
3. Remove the inlet and outlet hoses from the regulator fittings.
Push the hose into the fitting and push in on the flange at end of the fitting. While pushing in on the flange pull out on the hose.
4. Follow the air present switch wires to the controller board and remove noting the location for installing the new wires.
5. Remove the mounting nut and washer to remove the regulator.
6. Assemble the new regulator and mounting bracket with screw.
7. Mount the new regulator in the dispenser with the nut and washer.
8. Push the inlet and outlet airline into the fittings.
9. Route and connect the air present switch wires.
10. Connect the dispenser airline and adjust the regulator to 80psi.